

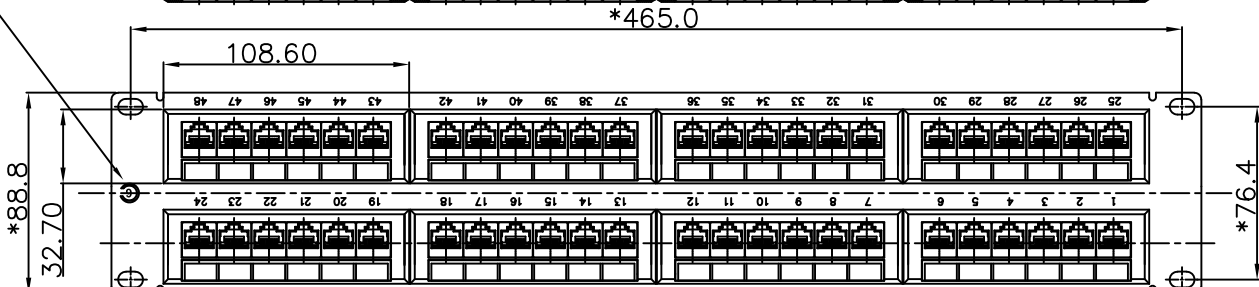
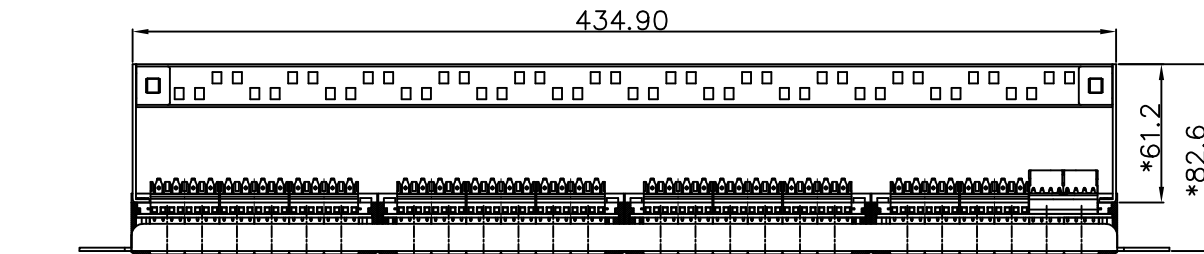


RoHS

THIS IS A RoHS COMPLIANT COMPONENT/ PRODUCT.

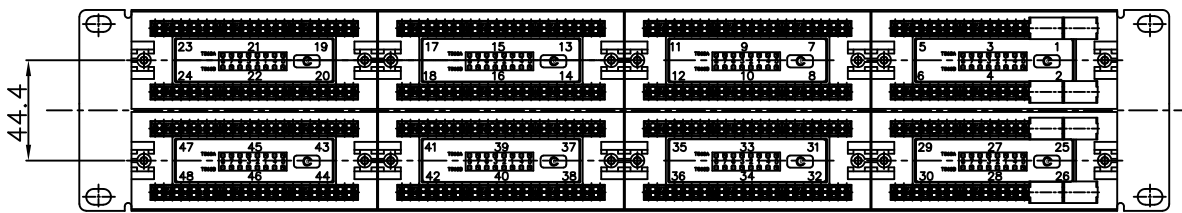

SCALE: 2.5:1
COLOR: WHITE

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC
- 2. CURRENT RATING : 1.5 AMP
- 3. CONTACT RESISTANCE : 100 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE: 1000 MEGOHMS MIN. @ 500 VDC
- 5. DIELECTRIC STRENGTH : 750 VAC 60Hz, 1MIN.

MECHANICAL:

- 1. HOUSING MATERIAL : PBT+30%GF. UL94V-0
- 2. PANEL FRAME : CARBON STEEL, POWDER COATING IN BLACK COLOR
- 3. IDC MATERIAL : PC UL94V-0
- 4. CONTACT : PHOSPHOR BRONZE WITH NICKEL PLATING

ENVIRONMENTAL:

- 1. STORAGE : -40°C TO +85°C
- 2. OPERATION : 0°C TO 70°C

CONFORMING TO TIA/EIA 568B.2
MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68. SUBPART F.
PART NUMBER: N422X-054-00

- 1-3U" 4-30U"
- 2-6U" 5-50U"
- 3-15U"

000000	NEW DESIGN	JESSE	112322'
MARK	ECN-NO.	REVISION RECORD	DRAWN DATE
CTK Contact Technology Co., Ltd. Material/Plated/Notes	UNLESS OTHERWISE SPECIFIED TOLERANCE	SCALE	CHECKED
	Dimension Range Tolerance	1/1	APPROVED
	X.X ±0.20	UNIT	mm
	X.XX ±0.15	SIZE	A3
X.XXX ±0.10	ANGLE	±5°	SHEET 1/1
SEE NOTE	48 PORTS C6 PATCH PANEL (W/C6)		
Tooling No.	PART NO. N422X-054-01	REV. 0	
	DOC. NO. NN422A054		