



RoHS

THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT.

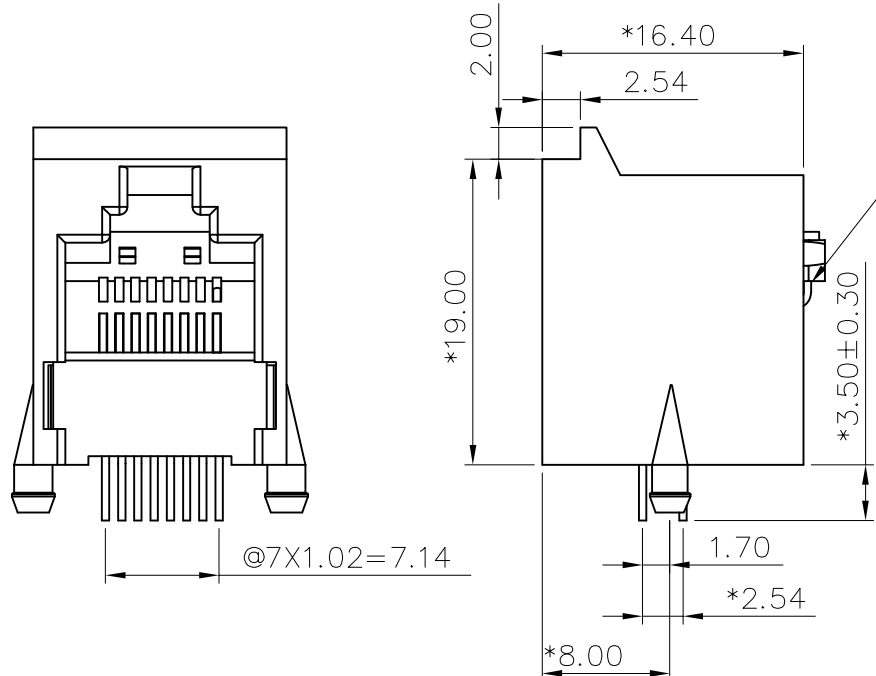

OPTIONAL SHORTING BAR

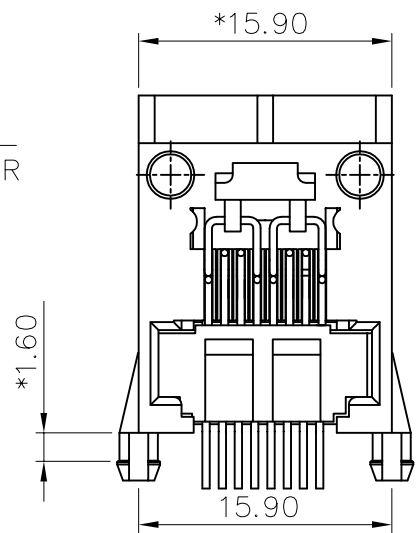

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE: 1000 MEGOHMS MIN. @ 500 VDC.
- 5. DIELECTRIC STRENGTH : 1000 VAC 60Hz, 1MIN.

MECHANICAL:

- 1. HOUSING MATERIAL : GLASS FILLED POLYESTER. UL94V-0.
- 2. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
- 3. PLATING : GOLD PLATING OVER NICKEL.
- 4. OPERATING LIFE : 750 CYCLES MIN.
- 5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
- 6. PCB RETENTION POST-SOLDER: 10 LBS MIN.


ENVIRONMENTAL:

- 1. STORAGE : -40°C TO +85°C.
- 2. OPERATION: -40°C TO +85°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: N331X-039-0X

- 1-3u" 2-6u" 01-POLYESTER. BK.
- 3-15u" 4-30u" Δ 02-POLYESTER. GY.
- 5-50u" 7-GOLD FLASH

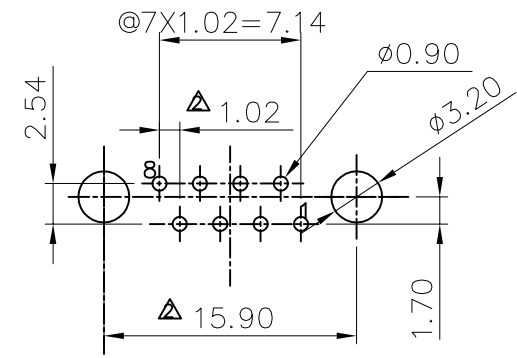

PC Board Layout Component Side Shown

Δ X0	0066000	NEW DESIGN	QUAN	020212'
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
CTK	UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE	CHECKED
	Dimension Range	Tolerance	1/2	APPROVED
	X.X	± 0.20	UNIT	
	X.XX	± 0.15	mm	
X.XXX	± 0.10	SIZE	A3	
ANGLE	$\pm 5^\circ$			
Material/Plated/Notes	NAME			
SEE NOTE	8P/8W PCB JACK (W/O KEY)			
Tooling No.	PART NO.	SEE NOTE	REV.	
	DOC. NO.	NN330A039	A	