
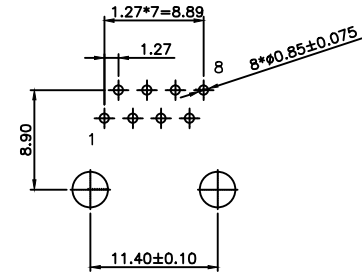







RoHS

THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT.



PC Board Layout
Component Side Shown

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC RMS .
- 2. CURRENT RATING : 1.5 AMP .
- 3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE : 1000 MEGOHMS MIN. @ 500 VDC.
- 5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:


- 1. HOUSING&INS MATERIAL : PBT, UL94V-0.
- 2. CONTACT MATERIAL : PHOSPHOR BRONZ T=0.30mm.
- 3. PLATING : GOLD PLATING OVER NICKEL.
- 4. OPERATING LIFE : 750 CYCLES MIN.
- 5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
- 6. PCB RETENTION POST-SOLDER : 10 LBS MIN.

ENVIRONMENTAL:

- 1. STORAGE : -40°C TO +85°C.
- 2. OPERATION : 0°C TO 70°C.

MATES WITH MODULAR PLUG CONFORMING TO TIA-1096-A.
PART NUMBER : N311X-111-01

1-3U" 2-6u" 3-15u"
4-30U" 5-50u"

△ XO	000000	NEW DESIGN	ANDY	022224
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
 Contact Technology Co., Ltd.		UNLESS OTHERWISE SPECIFIED TOLERANCE	SCALE	CHECKED
		Dimension Range Tolerance	1/1	APPROVED
		X.X ±0.20	UNIT	mm
		X.XX ±0.15	SIZE	A3
X.XXX ±0.10	ANGLE	±5°	SHEET	1/1
Material/Plated/Notes		NAME		
SEE NOTE		CAT.6 TOP ENTRY PCB JACK 8P		
Tooling No.		PART NO. SEE NOTE		REV. A
		DOC. NO. NN310A111		