

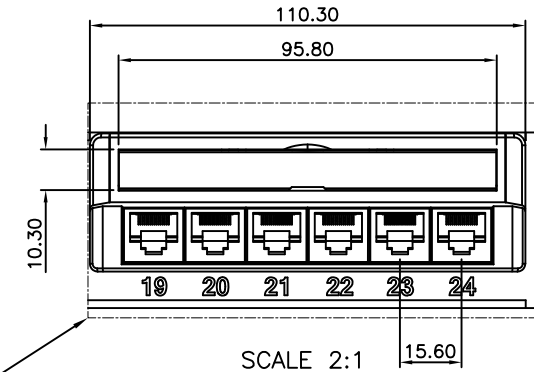
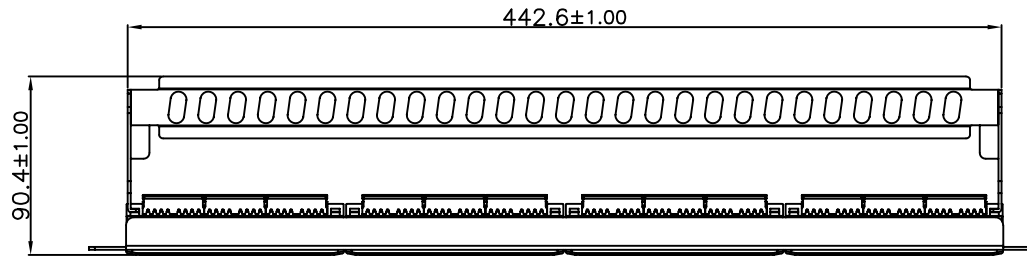



RoHS

THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT.

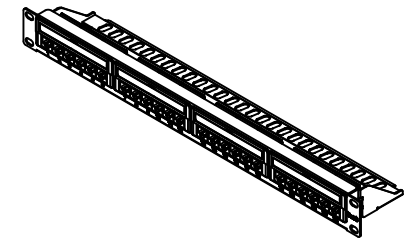

SCALE 2:1



**NOTES:**

**ELECTRICAL:**

- 1. VOLTAGE RATING : 125 VAC
- 2. CURRENT RATING : 1.5 AMP
- 3. CONTACT RESISTANCE : 100 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE: 1000 MEGOHMS MIN.@ 500 VDC
- 5. DIELECTRIC STRENGTH : 750 VAC 60Hz, 1MIN.

**MECHANICAL:**

- 1. HOUSING MATERIAL : ABS. UL94V-0
- 2. PANEL FRAME : CARBON STEEL, POWDER COATING IN BLACK COLOR
- 3. IDC MATERIAL : PC UL94V-0
- 4. IDC CONTACT : PHOSPHOR BRONZE WITH NICKEL PLATING T=0.5MM
- 5. WIRE : #23~26 AWG

**ENVIRONMENTAL:**

- 1. STORAGE : -40°C TO +85°C
- 2. OPERATION : 0°C TO 70°C

CONFORMING TO TIA/EIA 568B  
 MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68. SUBPART F.  
 PART NUMBER: N422X-336-0X

1-3u" 2-6u" 3-15u" 1.1W/C6 LOGO W/1-24  
 4-30u" 5-50u"

△	000000	NEW DESIGN	LONNY	080423'
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
<b>CTK</b> Contact Technology Co., Ltd.	UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE	CHECKED
	Dimension Range	Tolerance	1/1	APPROVED
	X.X	±0.20	UNIT	
	X.XX	±0.15	mm	
	X.XXX	±0.10	SIZE	A3
ANGLE	±5°		SHEET	1/1
Material/Plated/Notes	NAME			
SEE NOTE	24 Ports Patch Panel			
Tooling No.	PART NO.	N422X-336-0X		REV.
	DOC. NO.	NN422A336		0