

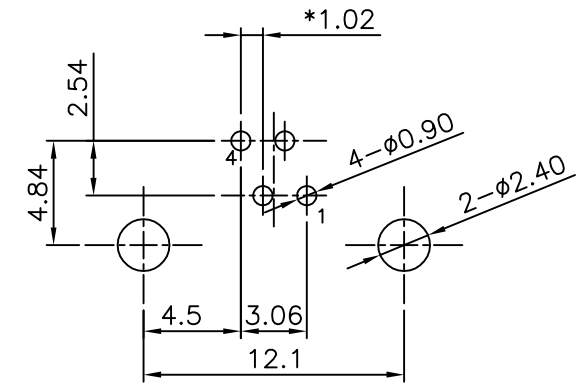


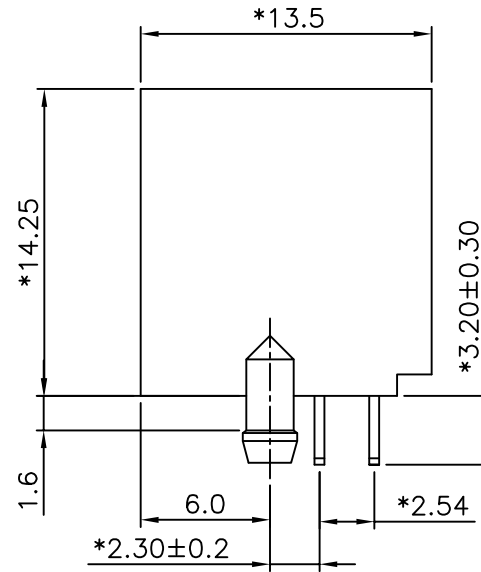

THIS IS A RoHS  
COMPLIANT  
COMPONENT/  
PRODUCT.

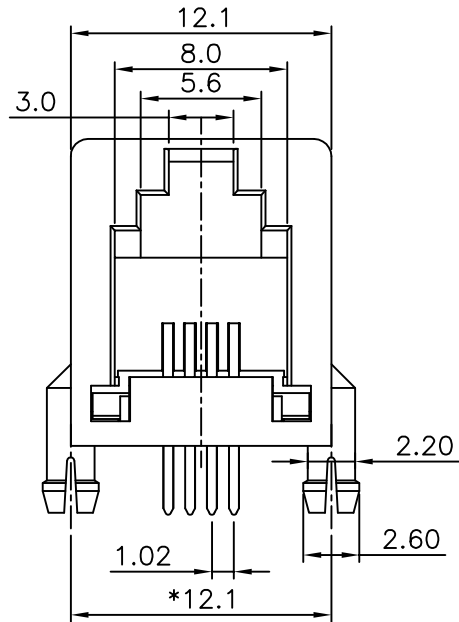

PC Board Layout Component Side Shown

**NOTES:**

**ELECTRICAL:**

1. VOLTAGE RATING : 125 VAC.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN. @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC 60Hz, 1MIN.

**MECHANICAL:**

1. HOUSING MATERIAL : GLASS FILLED POLYESTER OR HIGH TEMP. UL94V-0.
2. INSERT MATERIAL : GLASS FILLED POLYESTER UL94V-0 COLOR BK.
3. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35 mm.
4. PLATING : GOLD PLATING OVER NICKEL.
5. OPERATING LIFE : 750 CYCLES MIN.
6. PCB RETENTION PRE-SOLDER : 1 LB MIN.
7. PCB RETENTION POST-SOLDER: 10 LBS MIN.

**ENVIRONMENTAL:**

1. STORAGE : -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.

MATES WITH MODULAR PLUG CONFORMING TO TIA-1096-A.

PART NUMBER: K351X-106-XX

- 1-3u" 2-6u" 01-POLYESTER GY. 4P4C W/O PANEL STOP
- 3-15u" 4-30u"
- 5-50u" 7-GOLD FLASH

△X0	0000000	NEW DESIGN	Andy	113021	
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE	
 Contact Technology Co., Ltd. Material/Plated/Notes SEE NOTE		UNLESS OTHERWISE SPECIFIED TOLERANCE	SCALE 2.5/1	CHECKED	
		Dimension Range	Tolerance	UNIT	
		X.X	±0.20	mm	APPROVED
		X.XX	±0.15		
	X.XXX	±0.10	SIZE		
	ANGLE	±5°	A3	 SHEET 1/1	
NAME		MINI L/P STAMP PIN 4P			
Tooling No.	PART NO.	SEE NOTE	REV. 0		
	DOC. NO.	KK350A106			