
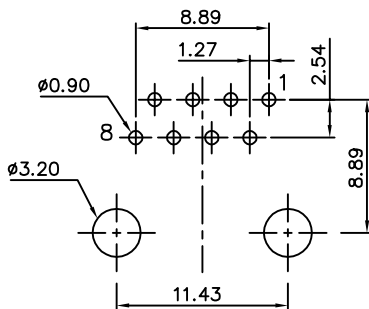
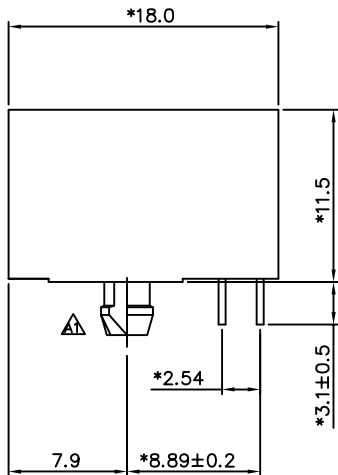
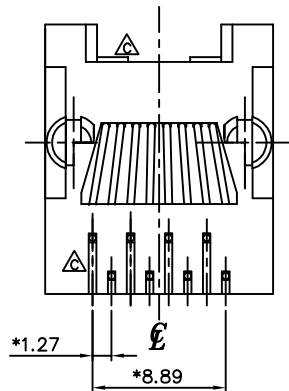
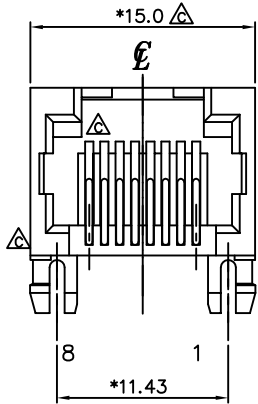


RoHS

THIS IS A RoHS COMPLIANT COMPONENT/ PRODUCT.



PC BOARD LAYOUT COMPONENT SIDE SHOWN

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE: 1000 MEGOHMS MIN. @ 500 VDC.
- 5. DIELECTRIC STRENGTH : 1000 VAC 60Hz, 1MIN.

MECHANICAL:

- 1. HOUSING MATERIAL : GLASS FILLED POLYESTER OR HIGH TEMP. UL94V-0.
- 2. CONTACT MATERIAL : PHOSPHOR BRONZE ϕ 0.46mm.
- 3. PLATING : GOLD PLATING OVER NICKEL.
- 4. OPERATING LIFE : 750 CYCLES MIN.
- 5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
- 6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- 1. STORAGE : -40°C TO +85°C.
- 2. OPERATION: -40°C TO +85°C.

MATES WITH MODULAR PLUG CONFORMING TO TIA-1096-A.

UL FILE NO: E306994

PART NUMBER: N331X-016-0X

- 1-3u" 2-6u"
- 3-15u" 4-30u"
- 5-50u" 7-GOLD FLASH

- 1- POLYESTER BK.
- 2- HIGH TEMP. BK.
- △3- HIGH TEMP GREEN
- △4- HIGH TEMP. YL.
- △5- 10P4C(2,3,4,7 PIN) YL 114C PBT
- △6-PBT YL 114C

△X1		新增"7"--Fu"的选项	JOY	082321'
△X1		ADD NEW P/N	JOY	060315'
△X1		ADD NEW P/N	JOY	060315'
△X6		UPDATE DRAWING	DORIS	071714'
△X2		ADD NEW P/N(3)	YANG	120108
△X1		MODIFY PEG DESIGN	LINGER	091407
△X0	000000	NEW DESIGN	LINGER	090207
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE

	UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE	CHECKED
	Dimension Range	Tolerance	2/1	
	X.X	±0.20	UNIT	APPROVED
	X.XX	±0.15	mm	
X.XXX	±0.10	SIZE		
ANGLE	±5°	A3	SHEET 1/1	

Contact Technology Co., Ltd. NAME

Material/Plated/Notes SEE NOTE RENAME RJ45 SIDE ENTRY PCB JACK

Tooling No.	PART NO.	SEE NOTE	REV.
	DOC. NO.	NN330A016	E