

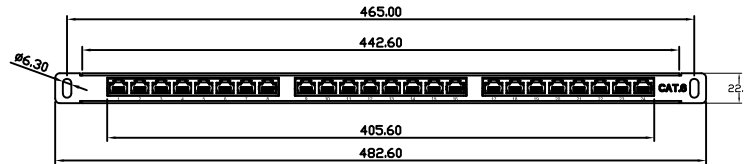
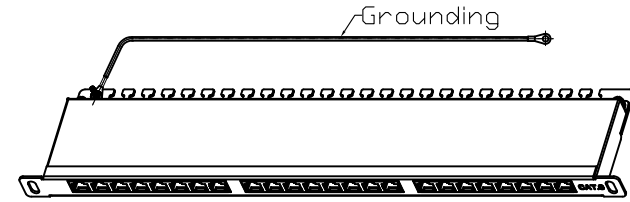
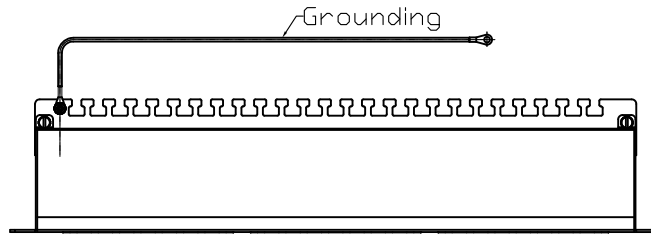


RoHS

THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT.

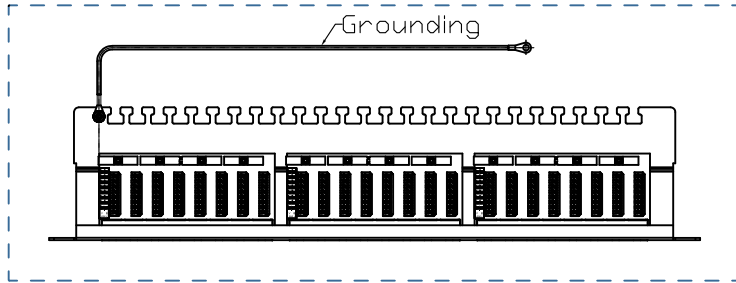

NOTES:

ELECTRICAL:

- 1.VOLTAGE RATING: 125 VAC RMS.
- 2.CURRENT RATING: 1.5 AMP.
- 3.CONTACT RESISTANCE: 100 MILLIOHMS MAX. @500 VDC.
- 4.INSULATION RESISTANCE: 1000 MEGOHMS MIN.
- 5.DIELECTRIC STRENGTH: 750 VAC RMS 60HZ,1MIN.

ENVIRONMENTAL:

- 1.STORAGE: -40°C TO +85°C
- 2.OPERATION: 0°C TO 70°C

CONFORM TO TIA/EIA 568B.2-1


MATES WITH MODULAR PIUG CONFORMING TO FCC PART68.

MECHANICAL:

- 1.HOUSING MATERIAL:PBT+15%GF UL94V-0.
- 2.PANEL FRAME:Zn PLATING THEN POWDER COATED(layer thickness 70~120um).
- 3.IDC MATERIAL:PC UL94V-0 CONTACT:PHOSPHOR BRONZE WITH TIN PLATING.

PART NUMBER:N422X-171-01

- 1.3U"
- 2.6U"
- 3.15U"
- 4.30U"
- 5.50U"

△ X0	0099000	NEW DESIGN	HENRY	022417'
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE
 Contact Technology Co., Ltd. Material/Plated/Notes	UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE	CHECKED
	Dimension Range	Tolerance	1/1	APPROVED
	X.X	±0.20	UNIT	
	X.XX	±0.15	mm	
X.XXX	±0.10	SIZE	A3	SHEET 1/1
ANGLE	±1°			
SEE NOTE		C6 FTP PATCH PANEL 24 PORT 0.5U		
Tooling No.		PART NO.	SEE NOTE	REV. 0
		DOC. NO.	NN422A171	